




Date stamp without height adjustment (Ø3 to Ø4mm)

mountable from the mould parting surface

...particularly suitable for thin-walled parts and low-viscosity media (e.g. rubber, etc.)

Description / Dimension table

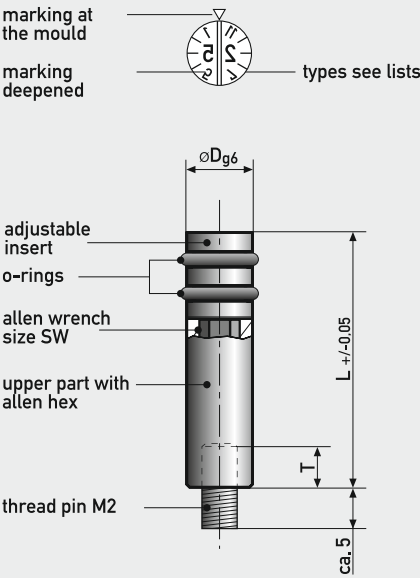

- Complete stamp and insert from moulded side changeable
- O-rings temperature resistant to 200°C
- Thread for fastening in the mould
- Engraving mirrored, recessed

Dimension table in mm (*Ø5 to Ø12mm on page 34 and 35)

D	3	4	5*	6*	8*	10*	12*
d	-	-	3	3	4	5	6
L	14	17	17	17	20	20	25
M	2	2	3	3	4	5	6
T	2	2	3	3	5	5	6
a	0.3	0.3	0.4	0.4	0.4	0.4	0.6
SW	2	3	2	2	3	3	4

material: 1.4034, hardened

Fixing and adjustment

- Mount the lower part.
- Insert the insert by turning clockwise and anti-clockwise under slight pressure and set the desired position.




Change

- Turn the insert clockwise as far as it will go, then turn the insert anti-clockwise until the insert can be removed.
- Insert the new insert by turning it clockwise and anti-clockwise while applying slight pressure.



Order key and example

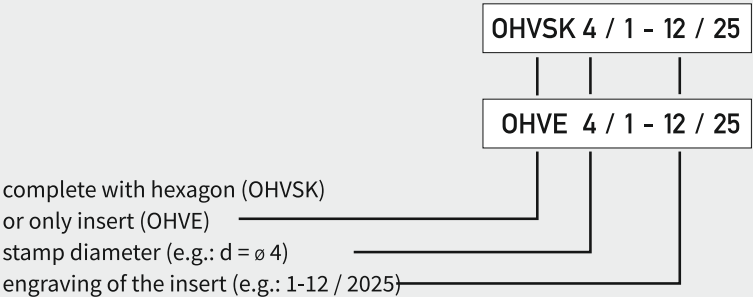

complete with hexagon (OHVSK)
or only insert (OHVE)
stamp diameter (e.g.: d = Ø 4)
engraving of the insert (e.g.: 1-12 / 2025)

Type	Indicator	Order number	Order number
	months + year	OHVSK3 / 1-12 / ..(year) OHVSK4 / 1-12 / ..(year)	OHVE3 / 1-12 / ..(year) OHVE4 / 1-12 / ..(year)
	months	OHVSK3 / 1-12 OHVSK4 / 1-12	OHVE3 / 1-12 OHVE4 / 1-12
	4 years (year+3)	OHVSK3 / ..(year)+3 OHVSK4 / ..(year)+3	OHVE3 / ..(year)+3 OHVE4 / ..(year)+3
	letters A-F	OHVSK3 / A-F OHVSK4 / A-F	OHVE3 / A-F OHVE4 / A-F
	marker elektrode	ME	